




troglotech


Troglotech Ltd
Unit 1, 3 Penns Road
Petersfield
Hampshire
GU32 2EW

Phone +44(0)1730 711240
Phone +44(0)1730 711240
Fax +44 (0)1730 711240
Email info@troglotech.com
Web www.troglotech.com

INITIAL USE GUIDE — T804 SYSTEM

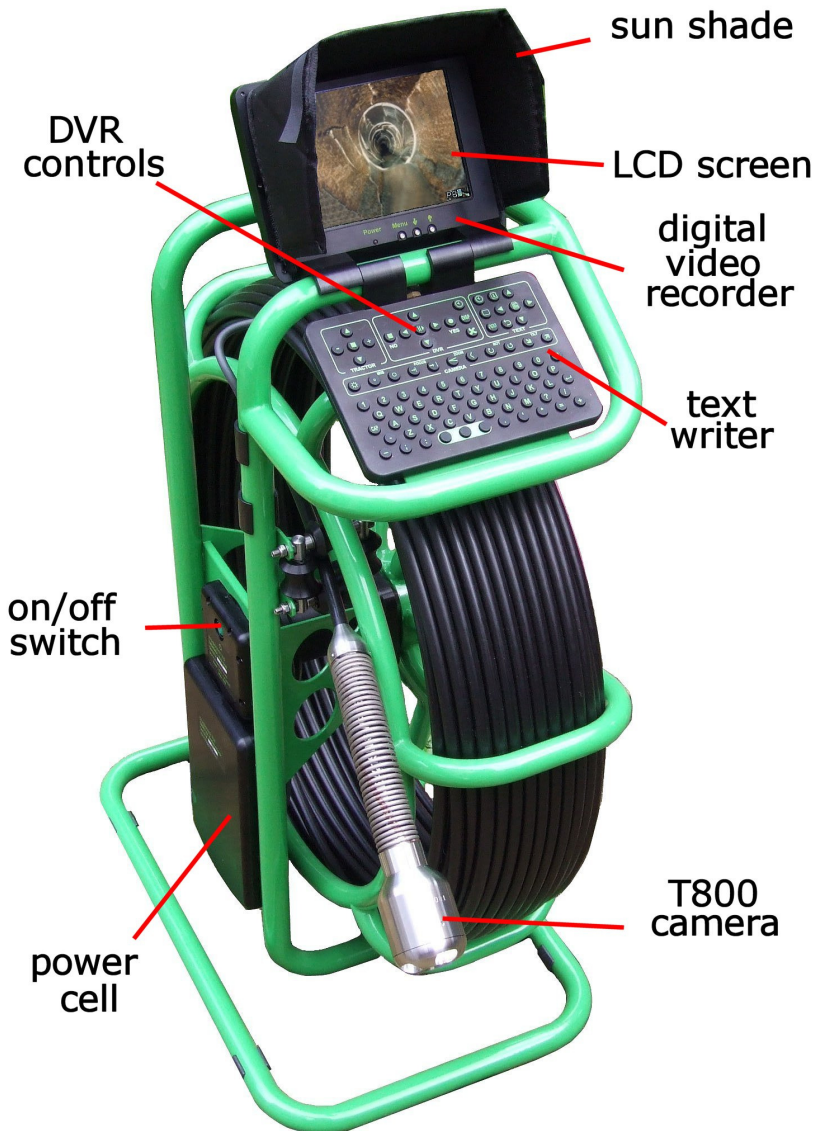

QUICK START GUIDE

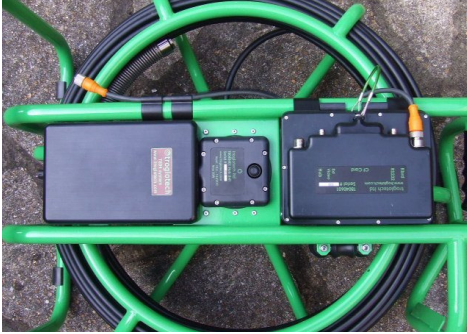

1) The T804 is delivered with the Control Unit and Keyboard fitted as above and secured with tie-wraps




2) Cut the tie-wraps. Disconnect the Keyboard connector



3) Remove Control Unit from frame



4) Remove Keyboard from frame

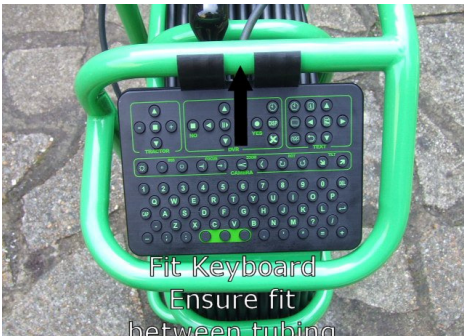

5) Fit Keyboard to top frame



6) Fit Control Unit to top frame. It is easier to fit one clip at a time

QUICK START GUIDE



7) Connect Keyboard connector to the Control Unit



8) Connect Link Cable to Control Unit




9) Fit two of the cable clips as shown to secure the Link Cable. There are 4 clips supplied with the system.



10) Adjust the brake lever so that the coiler can be turned with a little resistance




11) Cut tie-wrap and remove soft cover from termination. Thread the termination through the Rod Guide

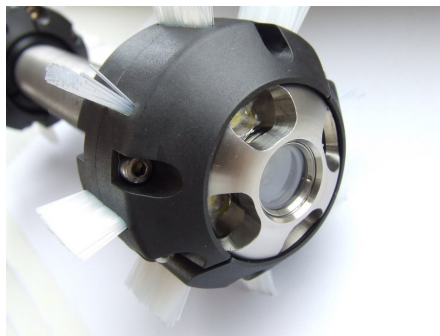


12) Fit the T800 camera to the termination. Fit skid set (see website links for full instructions)



QUICK START GUIDE

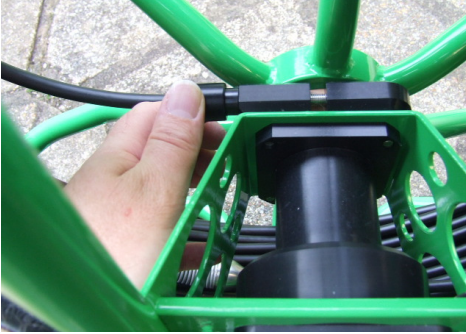

13) Tighten brake to ensure coiler is secure

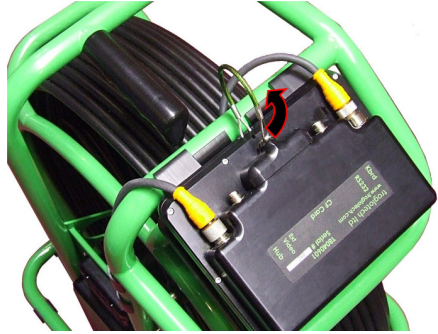

14) Remove CF card cover by pulling UP and then BACK on the hawser



15) Fit CF card and replace cover



16) Remove the protective film from the Control Unit LCD



17) Switch T804 ON



18) Press the 'CAL' button until the screen shows 'Counter Calibrated'. The T804 is now ready for use